



AIR CONDITIONING



REFRIGERATION



HEATING



ASPEN PUMPS INC



UNIVOLT

Mini Aqua®

CONDENSATE REMOVAL PUMP

The world's slimmest condensate removal pump is designed to fit where other's can't! Featuring universal voltage management.



CSI compliant



3.2 US Gal/h / 12L/h max. flow



33ft / 10m max. rec. head (flow rate 1.6 US Gal/h / 6L/h)



25dB(A)

KEY FEATURES




- Univolt
- Ultra slim
- High performance
- Plug & play

SUITABILITY

- Up to 4.5ton / 54,000Btu/h
- Ductless mini split systems; Ducted units; Floor standing & Chassis units
- ✓ **Perfect for...** installing directly inside the unit

0.18 kg
Pump only

6.3 oz

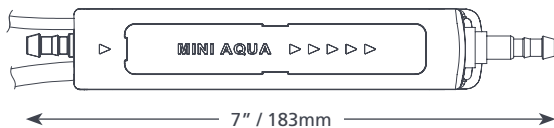

MINI AQUA UNIVOLT @ 60Hz



Max. flow @ 0 head	3.2 US Gal/h / 12L/h
Max. rec. head	33ft / 10m
Max. suction lift	6.5ft / 2m
dB(A) @ 3ft / 1m	25
Power supply	100-250 VAC, 0.2A, 16W, 50/60Hz
Rated	Non continuous
Class	II appliance <input type="checkbox"/>
Max. unit output	4.5ton / 54,000Btu/h
Max. water temp	104°F / 40°C
Discharge tube	1/4" / 6mm ID
IP Protection	IP24
Safety switch	3.0A Normally closed
Thermal protection	✓
Fully potted	✓
Self priming	✓

MINI AQUA UNIVOLT OPTIONS

Mini Aqua Univolt FP1035/RS

IN THE BOX

Mini Aqua Univolt pump • 5ft / 1.5m Plug & play power cable • Reservoir (inc. filter, float, lid) • 6" / 150mm Vinyl breather tube 1/4" / 6mm ID • Anti siphon device • 5ft / 1.5m Suction tube 1/4" / 6mm ID • 8 1/2" / 220mm Blue inlet hose 9/16" / 14mm ID • Drain connector kit • Inline Fuse • Fixing kit • Install manual

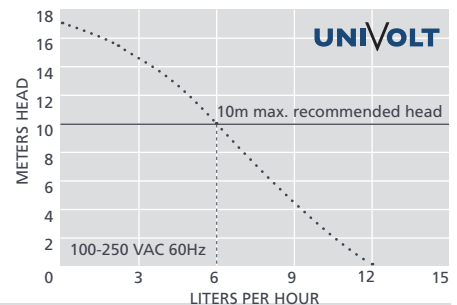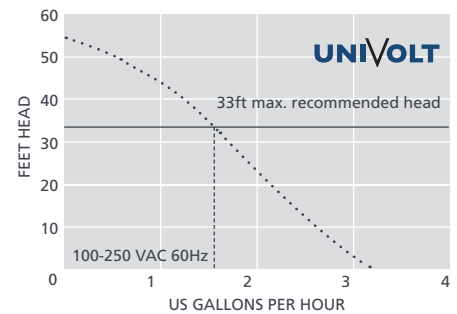

Information correct at time of going to press.

Download manual at aspenspumps.com

View install video at aspenspumps.com